



GN4/8 Wall mount simultaneous Li-ion battery charger

for B-Mount, V-Mount/Vmicro and A-Mount/Amicro

User Manual

WE STRONGLY RECOMMEND THAT YOU READ THIS INSTRUCTION BEFORE USING YOUR BEBOB VGN4 CHARGER! PLEASE KEEP THIS MANUAL FOR FUTURE REFERENCE

1

Features

- 4 / 8 Channel Wall-Mount Simultaneous 16,8V Li-Ion Charger
- 200W Power – with Fast Charge Option via 2 Channels (2x5A max.)
- Cascade Option with other bebob Wall-Mount Chargers via AC Loop-Through Connection
- Carrying Handle for Flexible Use also On Set

Safety instructions

- Only for professional use! Keep Charger out of reach of children and personnel that has not been instructed in the use!
- Use only with recommended batteries.
- Keep the charger dry and do not immerse in water. Do not cover the charger under use.
- A standard three-pin AC plug must be used and earth pole must be connected to the earth line.
- Do not keep in contact with any part of the body while the charger is in working status.
- Do not use or store the charger in unstable, dusty or damp environments.
- Remove the battery from the charger after the charging process is complete.
- Do not attempt to open or repair the charger. Contact your dealer for help if it becomes defective. Handle with care! Do not throw! Do not drop!

¹ The charger is available as B-Mount-, Vmicro-, Vmount-, Amicro-, Amount -version.

Charging

- Never leave batteries unattended while charging
- All Channel Status indicator show green when the charger is turned on with no battery connected
- The Channel Status indicator turns red when a battery is placed on the corresponding channel and the charging process has begun
- The Channel Status indicator turns back green when the battery is fully charged
- The Channel Status indicator turns Yellow when a battery is placed on the corresponding channel and the charging process fails for damage or safety reason.
- Cooling fan will be activated during the charging process
- Fast simultaneous/sequential charging with 5A in case for B-Mount, Vmicro, Vmount, Amicro and Amount batteries by using only channel 1 and 3.

Warranty

- The GN4/8 is covered by a 2 years unconditional warranty on all parts.
- For warranty issues or if you have any additional questions, please contact the appropriate bebob distributor listed at www.bebob.de.


Accessories

- 1 x AC cable
- 1 x AC cascade cable
- 2 x Fixing plate
- 1 x hexawrench

Set up:

Modes: 4x2,5A normal charge mode via all channels or 2x5A max. fast charge option via channels 1 and 3:

Top View

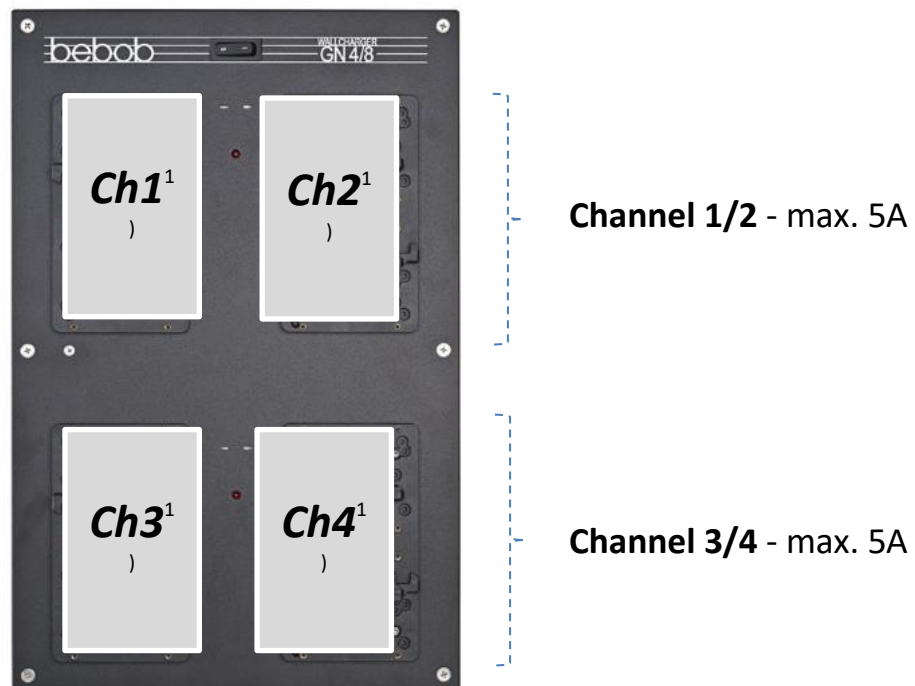


1) In case of micro Wall Mount charger: In addition slot **A** and **B**.

Operating elements




Mounting

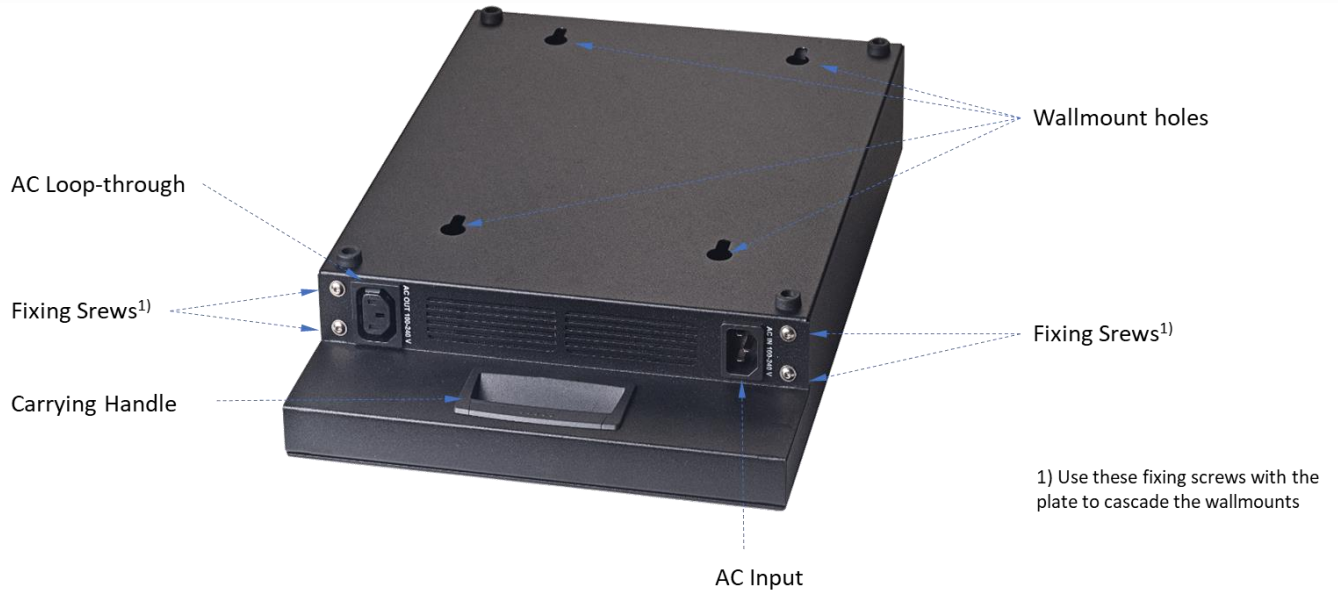

The drilling pattern of the wall mount charger is in the annex of this operation manual

Cascading:

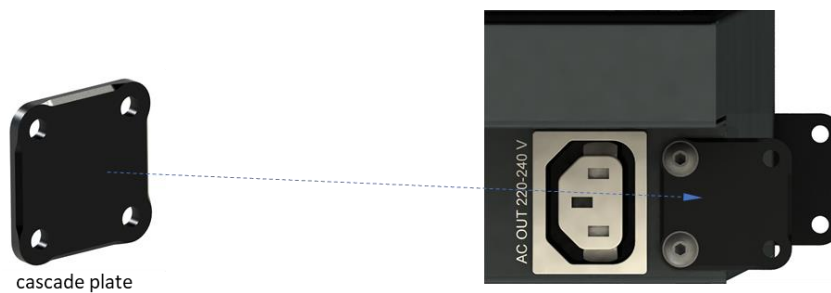

Specifications

Specifications

| | | |
|-------------------------|---|---|
| Model | B-Mount V-Mount A-Mount Vmicro Amicro | BGN4 VGN4 AGN4 VGN8micro AGN8micro |
| Channel | 4 Channels / 8 Channels (micro model simultaneous charger) | |
| Charger (nominal specs) | 16,8V // max. 10A <ul style="list-style-type: none"> ▪ 2x5A max. fast charge option ch1 / 3 ▪ 4x2,5A normal charge all channels | |
| Cascade Option | Yes, capability depends on AC circuit fuse | |
| AC Input ratings | 90-264V/47-63Hz 200W | |
| Weight | BGN4 VGN4 VGN8micro AGN4 AGN8micro | 3,87kg 3,84 kg 4,30kg 3,87kg 3,87kg |
| Dimensions (WxHxD) | 270 x 67,5 x 410mm (min) 270 x 89,7 x 410mm (max) | |
| Batteries | bebob, idx, sony | |
| Charging time | depends on the battery capacity | |
| Operating Temp. Range | - 10°C ~ + 35°C | |

Annex

