

New 7.2 V Battery Replacement Solutions for Sony Users

L-Series Batteries - Affordable High Capacity Batteries with Multiple Power Outputs



SL-F50

- Capacity: 48Wh, 6600 mAh
- Max Draw: 6.0A / 30W
- Dim: 1.5 (W) x 2.41 (H) x 2.78 (D) in.
- Weight: 0.55 lbs
- Protection: over-current, over-charge, over-discharge



Product Features

- 48Wh / 6600 mAh capacity
- Compatible with all Sony L-series mounts
- Features X-Tap and USB outputs
- X-Tap port can also be used to charge the battery using the LC-XT1 X-Tap charger
- 4 Power Indicator LEDs
- Protected from over-charge, over-discharge, and over-currents at high loads



SL-F70

- Capacity: 72Wh, 9900 mAh
- Max Draw: 8.0A / 40W
- Dim: 1.5 (W) x 3.17 (H) x 2.78 (D) in.
- Weight: 0.77 lbs
- Protection: over-current, over-charge, over-discharge



Product Features


- 72Wh / 9900 mAh capacity
- Compatible with all Sony L-series mounts
- Features X-Tap and USB outputs
- X-Tap port can also be used to charge the battery using the LC-XT1 X-Tap charger
- 4 Power Indicator LEDs
- Protected from over-charge, over-discharge, and over-currents at high loads

Product Information

The SL-F50 and SL-F70 are battery replacement solution for equipment/accessories using the Sony L-series batteries. Both batteries feature a USB output and X-Tap output, capable of charging the battery or powering 7V accessories (X-Tap charger, LC-XT1, is necessary to charge through the X-Tap port). Other compatible chargers: IDX's LC-2A 2ch simultaneous charger with interchangeable plates.

X-Tap/USB Outputs

1 x X-Tap
1 x USB

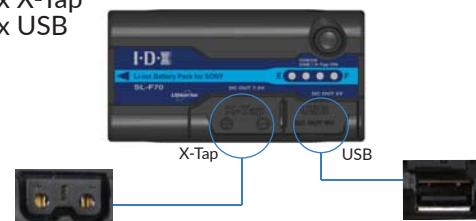

** IDX reserves the right to change the specifications contained herein without notice.