


DLED2 TECHNICAL DATA

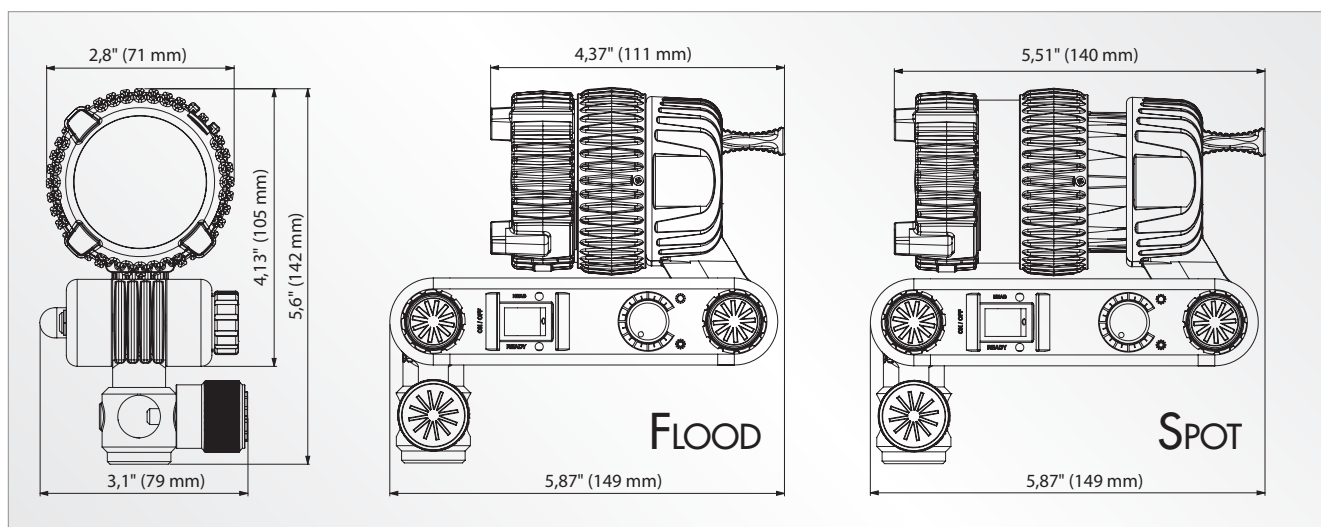

FOCUSING LED LIGHT HEAD:

Focus Range (Intensity Range)	50° - 5° (1:7)
Focus Control	3/4 turn on focus ring
Power	25 W, 6 - 18 V DC
Mounting	5/8" (16 mm) receptacle and 1 1/8" (28 mm) stud OR: optional with shoe mounting (e.g.: DLED2HSM-BI) OR: with yoke and separate power supply (e.g.: DLED2Y-BI)
Operating Position	Any, except electronics directly over light head
Tilt Control	Adjustable friction
Accessory Holder*	Ø 2.3" (58 mm)
Safety	Protection Class III, SELV, IP40
Cooling	Passive cooling (no fan)
UV	No UV radiation
Weight	1.8 lb (800 g)
Size	W: 3.1" (79 mm) L (flood) : 5.87" (149 mm) L (spot) : 5.87" (149 mm) H: 5.6" (142 mm)

* for mounting the unique range of DLED2 front-end accessories

PHOTOMETRICS: Focusing LED Light Head daylight

Distance	Meter	1	2	3	4	5	10
	Feet	3'	6'	9'	12'	15'	30'
Flood	Lux	810	203	90	50		
	Foot Candle	75	19	8,3	4,6		
Medium	Lux	1800	450	200	113	72	
	Foot Candle	167	42	19	11	6,7	
Spot	Lux	5250	1312	583	328	210	
	Foot Candle	487	122	54	30	20	

PHOTOMETRICS: Focusing LED Light Head bicolor (daylight)

Distance	Meter	1	2	3	4	5	10
	Feet	3'	6'	9'	12'	15'	30'
Flood	Lux	870	218	97			
	Foot Candle	81	20	9			
Medium	Lux	1440	130	160	90		
	Foot Candle	134	12	15	8		
Spot	Lux	8600	2150	956	538	344	
	Foot Candle	800	200	89	50	32	

Bicolor in tungsten function ~ 25% lower output

