Litepanels

# GEMINI 1X1 SOFT

## LIGHT IT YOUR WAY

**Light your scene faster and brighter on location or in the studio with the Gemini 1x1 Soft RGBWW LED panel from Litepanels.** Delivering full spectrum, accurate Daylight and Tungsten light with the ability to dial in any color imaginable and a wide selection of lighting effects, the lightweight, quick-to-rig, and easy to control Gemini is the ultimate no-crew lighting solution for image makers on the go.

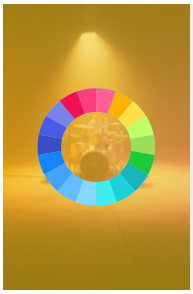

## Perfect light instantly available

**Every color at your fingertips.**

Total control of light with four lighting modes; CCT Mode for true Daylight and Tungsten with fine tuning; HSI Mode to create any color in the 360° color wheel; Gel Mode to quickly dial up many popular gels, and Effects Mode for a dazzling array of creative lighting effects at your fingertips.

## Easily switch between battery and AC

**The industry's most agile light on the go.**

A Lightweight design for rapid rigging with fewer cables and full-intensity mobile power from XLR, V-Mount or Gold Mount batteries - drawing just 200W - makes Gemini 1x1 Soft the perfect location light.

## Instantly accessible and easy to rig

**No parts to assemble, Gemini is ready to start work immediately.**

Ready to go straight out of the box with no assembly required. Easy to reach, on-board controls and remote-control options via DMX, wireless DMX or Bluetooth for easy integration into your existing lighting set up.

## Serious Stability

**Flicker Free Light with no color shift.**

Flicker-free light at any frame rate or shutter angle and at any intensity level perfect for creating slow motion shots with Ultra-smooth dimming from 100 to 0.1%.

### GEMINI SPECS

**Voltage Range:** 100-240VAC, 13-28VDC
**Power Consumption:** 200W (nominal)
**LED Technology:** RGBWW
**Color Temperature:** 2700-10000K
**Lighting Intensity:** 3.2k @ 10ft / 3m = 557 LUX, 5.6k @ 10ft / 3m = 614 LUX
**CRI / TLCI:** Daylight: 97, Tungsten: 94
**Beam and Field Angle:** 95° / 157°
**Control:** Built-in WIFI, DMX (5 PIN & RJ45), Optional Wireless DMX, Bluetooth, SmartLite Director App
**Color Controls:** Kelvin Temperature, plus/minus green, Hue, Saturation, Intensity, Gel Presets

**Low End Dimming:** From 0.1%
**Battery Powered:** Optional plates available, runs at 90% output on single 14.4V battery, or 100% on 26V or dual 14.4V batteries
**Cooling:** Fan, at 50% output when disabled. Fan delayed start option
**Mount:** 1-1/8" (28mm) pin, Standard Yoke, stackable as 2 & 4 units
**Fixture Dimensions:**
12.6 x 12.6 x 4.6" / 320 x 320 x 119mm
**Weight:** 11.7lbs / 5.31kg

| | | | |
|---|---|---|---|
| **945-1101** Gemini 1x1 Soft Panel-**EU** | **945-1111** Gemini 1x1 Soft Panel-**EU** w/Pole Op Yoke | **945-1201** Gemini 1x1 Soft Panel-**UK** | **945-1211** Gemini 1x1 Soft Panel-**UK** w/Pole Op Yoke |
| **945-1301** Gemini 1x1 Soft Panel-**US** | **945-1311** Gemini 1x1 Soft Panel-**US** w/Pole Op Yoke | **945-1401** Gemini 1x1 Soft Panel-Bare Ends Power Cable | **945-1411** Gemini 1x1 Soft Panel-w/Pole Op Yoke, Bare Ends Power Cable |

### OPTIONAL ACCESSORIES

- Diffusers - Light, Med, Heavy
- Intensifier
- Honeycomb
- 4-Way Barndoors
- Stacking Kit (2x, 4x)
- Fixture Cover
- Hard Case
- Soft Carry Case
- Snapbag®
- Snapgrid®
- Pole Operated Yoke
- Gold Mount Battery Plate
- V Mount Battery Plate
- Array Kits

## PHOTOMETRICS Beam Angle 95° / Field Angle 157°

| DAYLIGHT | Footcandles | LUX |
|---|---|---|
| 3.3ft / 1m | 513 | 5526 |
| 10ft / 3m | 57 | 614 |
| 16ft / 5m | 21 | 221 |
| 33ft / 10m | 5 | 55.3 |
| 49ft / 15m | 2 | 24.6 |

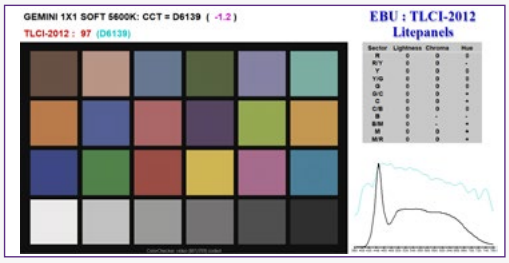


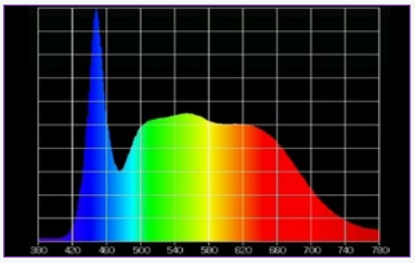
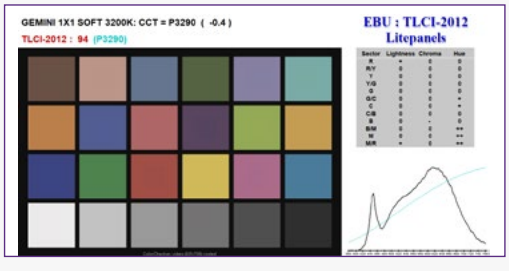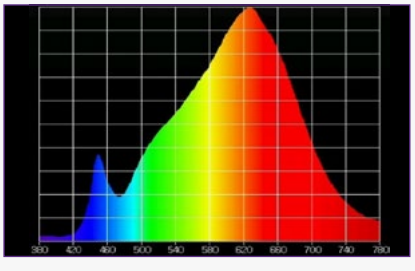
| TUNGSTEN | Footcandles | LUX |
|---|---|---|
| 3.3ft / 1m | 466 | 5012 |
| 10ft / 3m | 52 | 557 |
| 16ft / 5m | 19 | 201 |
| 33ft / 10m | 5 | 50.1 |
| 49ft / 15m | 2 | 22.3 |