



AX5-CHRSE

TriplePAR Charging case

Data sheet

Electrical

Input

100~240VAC

4.4A@115VAC / 3A@230VAC

Output

8 x 25.5VDC, 2.5A

Construction

Material

Plywood

Aluminium

Operating Temperature

0-40 °C

32-104 °F

Weight (empty)

45kg

Dimensions

740 x 580 x 540 mm

Environment

Indoor

Connectors/Cables

8 x DC charging ring

1 x AC cable

Can Hold



8 x TriplePAR
AX5



16 x diffuser
AX5-FF
AX5-WWF




8 x Manfrotto 191 bolt*



8 x brackets**
(Can be ranged separately)



8 x Super Clamps
Manfrotto super clamp

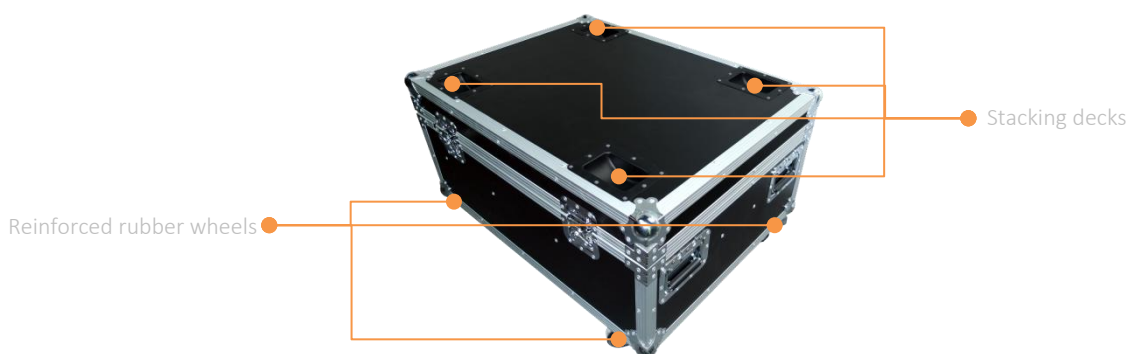

*Bolts can be ranged separately or installed on the AX5.

**AX5 brackets can be removed or installed in the AX5 while ranging it