


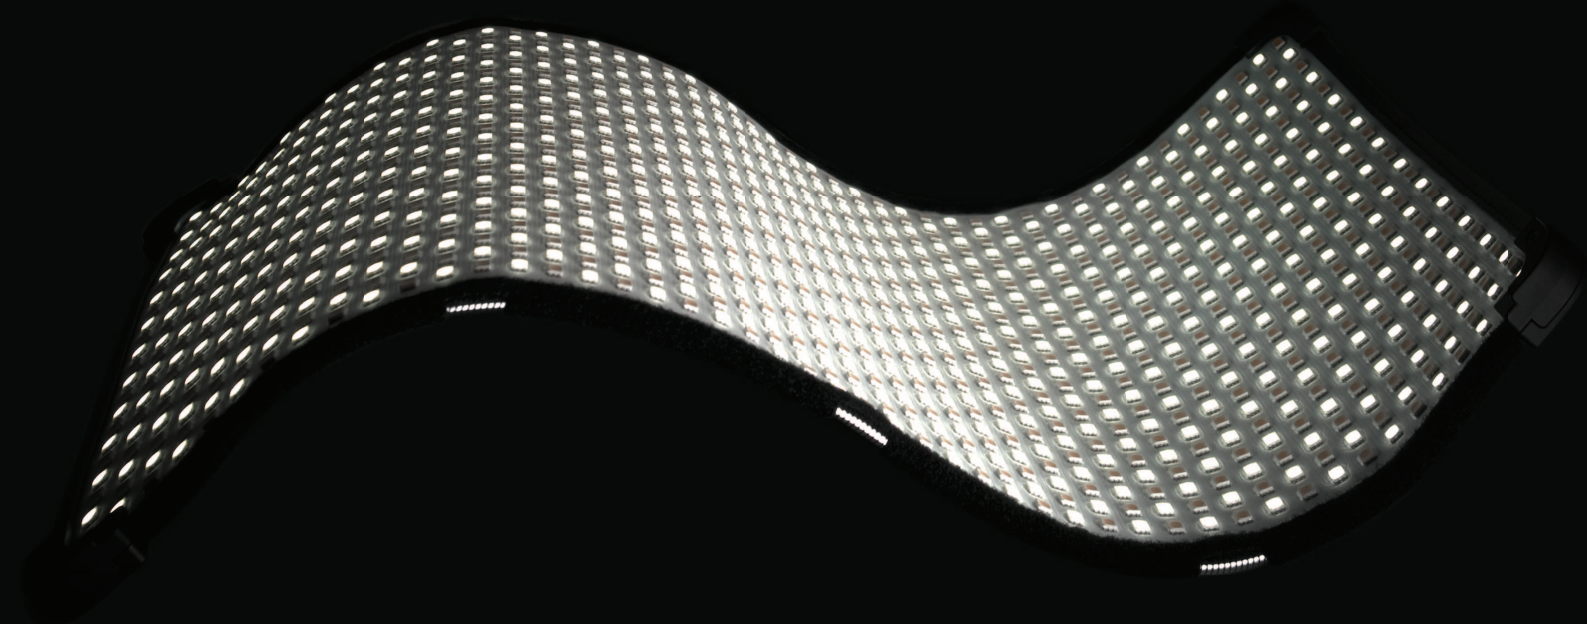

## FL 600 / 1200

**Pliable** form. **Powerful and precise** lighting.  
**High-quality Filmmaking** Performance.

FOMEX Flexible LED Light provides a versatile lighting system through significant improvements, allowing cinematographers and photographers the versatility of having a flexible and rigid LED light in one.

Superior feature of FL 1200 DMX Control. Lock function to stay fixed value of light output & color temperature. Quick function to select pre-set color temperature.



# FOMEX flexible LED

The portable FOMEX Flexible LED light gives variable color temperature control – Tungsten through Daylight. FL 600 / FL 1200 have a CRI and TLCI rating of 98 to ensure high color purity. Their pliable form allows setup in a variety of places where normal light fixtures or panels can not go. Designed with precise dimming control and IP64 rainproof rating.






FL 600



FL 1200



## Spectrum Report

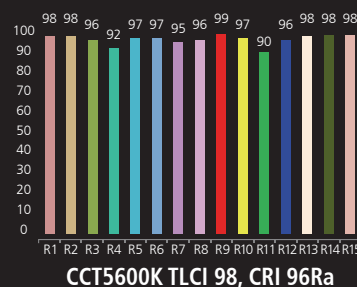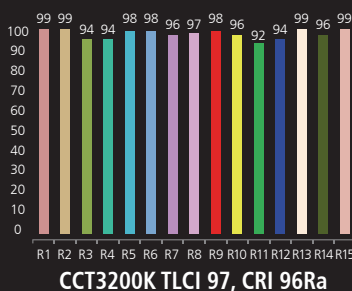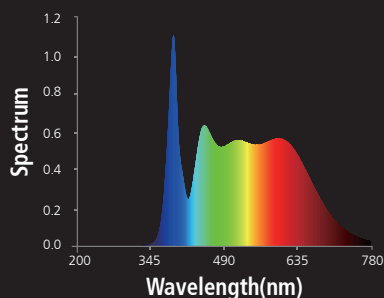

## Specification

| Model                  | FL 600                                 | FL 1200                                |
|------------------------|----------------------------------------|----------------------------------------|
| Light Output(Lux)      | 1900lx @1m; 3200K<br>2000lx @1m; 5600K | 3800lx @1m; 2700K<br>4000lx @1m; 6500K |
| Power Consumption      | 60W                                    | 120W                                   |
| CRI / TLCI             | CRI 96~98 / TLCI 98                    | CRI 96~98 / TLCI 98                    |
| Color Temperature      | 3200K~5600K                            | 2700K- 6500K                           |
| Dimmer                 | 0~100% DIM /<br>Manual                 | 0~100% DIM /<br>DMX 512 / Manual       |
| Color Temp Control     | 50K Steps                              | 100K Steps                             |
| Light Output Connector | 6Pin Waterproof                        | 4Pin Waterproof                        |
| IP Rating              | IP64                                   | IP64                                   |
| DC Input               | DC 13.8~24V (6Pin)                     | DC 12~24V (4Pin)                       |
| DMX In / Out           | -                                      | 5Pin XLR                               |
| Beam Angle             | 120°                                   | 120°                                   |
| LEDs                   | 576                                    | 1152                                   |
| Battery Mounts         | V-Mount / Gold Mount                   | V-Mount / Gold Mount                   |
| Dimensions (mm)        | 300 X 300                              | 300 X 580                              |
| Weight                 | 415g                                   | 760g                                   |



SCAN  
QR CODE  
TO SEE FOMEX

Unit701, 31-18Gil, Seongsui-ro, Seongdong-gu, Seoul Korea 04787 Tel +82 2 545 0004 Fax +82 2 3444 9399

www.fomex.com e-mail : info@fomex.com

All product specifications are subject to change without prior notice

VER. 201710(EN)