




KINO FLO
Lighting Systems

FreeStyle 41

LED



FreeStyle 41 LED DMX

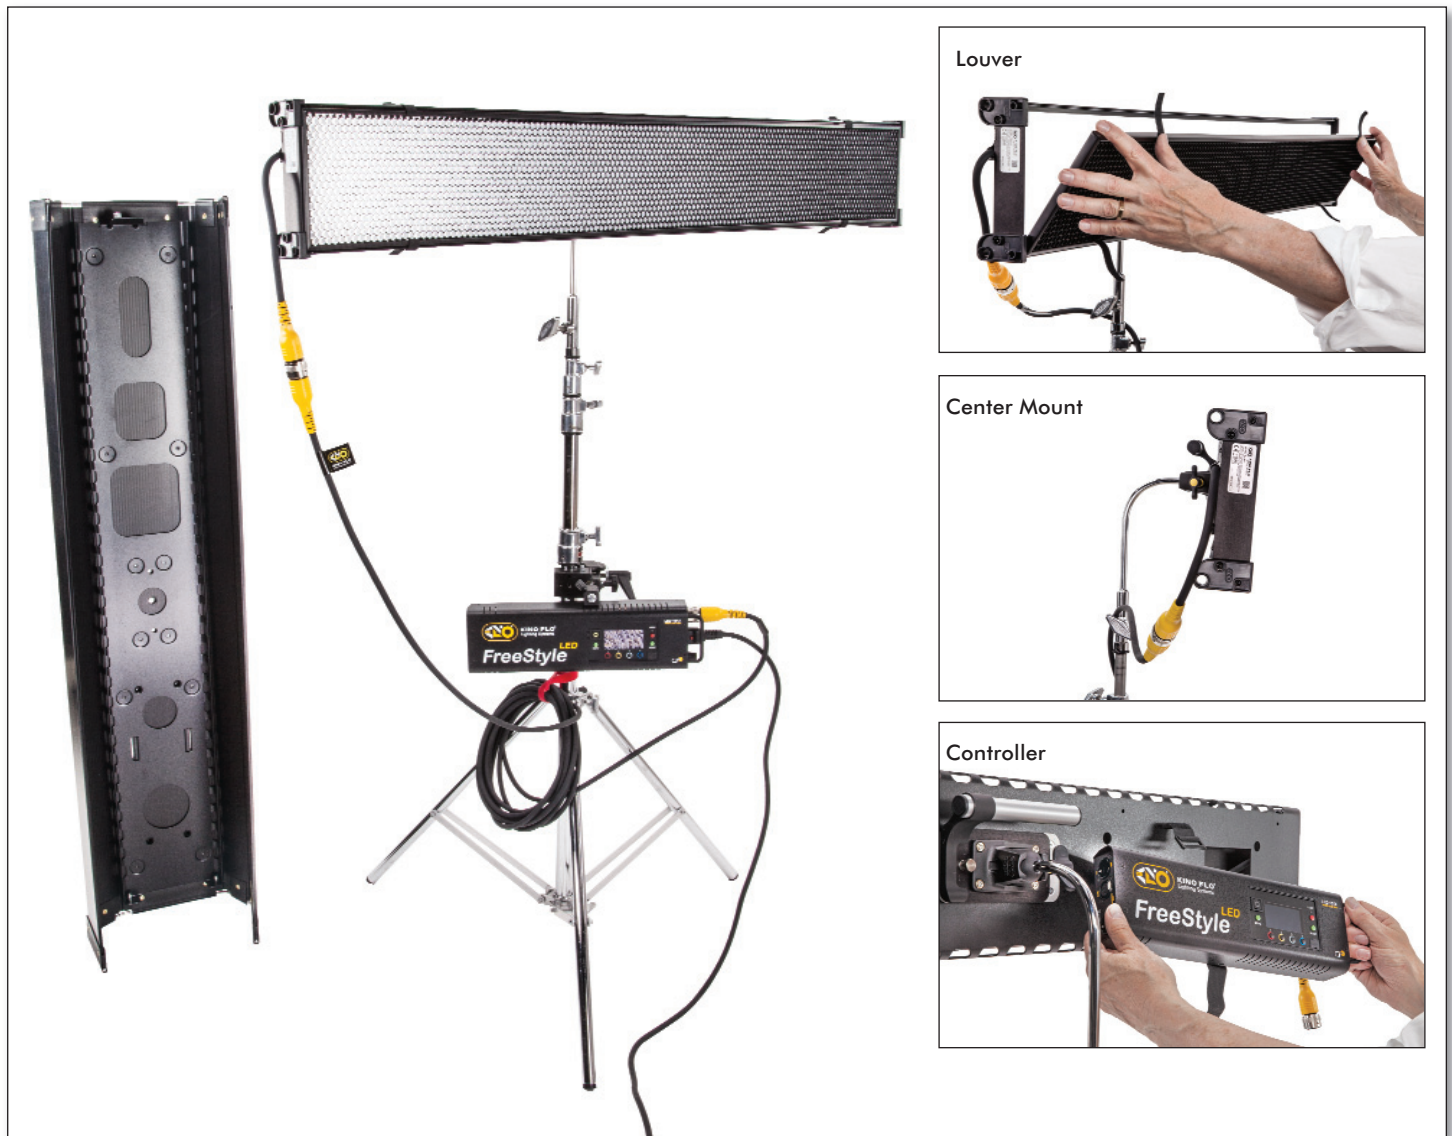

FreeStyle LED has three menu options, one white and two color menus. With white light Kelvin range is from 2700K to 6500K with **Dimming, Kelvin and Green/Magenta** control channels. In the color menu, Kelvin range is from 2500K to 9900K, with three additional channels, **Gel, Hue Angle and Saturation**. The Gel channel includes Kino Flo presets such as blue & green screen and over 100 well-known lighting gels. In addition, the Hue Angle and Saturation behave similar to a traditional color wheel, where you have white light in the center, and the Hue angle determines the color along a 360° range. And Saturation determines how much color is applied. The second color menu provides individual red, green, blue (**RGB**) control. For additional versatility, the FreeStyle LED panel can be easily removed from the housing and mounted onto a stand. The Gaffer Tray accessory allows further flexibility with its slim profile and center mount and screw points. The controller comes with standard DMX, wireless DMX (Lumen Radio®), universal voltage input 100-240VAC and 24VDC. It can be mounted to the fixture or run remotely with a 25ft extension cable.

Features include:

- Kelvin presets & custom settings, 2500K-9900K
- Dimming without color shift
- Green/Magenta control
- Dial in any color through Hue Angle and Saturation control
- Kino Flo presets and Gels
- Individual Red, Green, Blue (RGB) control
- Manual & DMX Dimming, DMX wireless (Lumen Radio)
- Removable fixture includes built-in Barndoors, Honeycomb Louver
- Twist-on, locking Center Mount and corner mount options
- KinoGrip Center Mount

▼ FreeStyle 41 LED DMX Systems



CFX-F41
FreeStyle 41 LED Fixture



LED-151X-120U
FreeStyle 151 LED DMX Controller, Univ 120U



LED-151X-230U
FreeStyle 151 LED DMX Controller, Univ 230U



MTP-BG41
KinoGrip 41K Mount w/ Baby Receiver (16mm)



X12-25
FreeStyle Extension, 25ft

▼ Photometrics

FreeStyle 41

| | | | | | | | | | | |
|--------|------|------|------|-----|-----|-----|-----|-----|-----|-----|
| FC | 481 | 161 | 77 | 45 | 29 | 21 | 16 | 12 | 10 | 8 |
| Feet | 2 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 |
| LUX | 6840 | 2450 | 1210 | 712 | 462 | 325 | 242 | 189 | 153 | 123 |
| Meters | 0.5 | 1 | 1.5 | 2 | 2.5 | 3 | 3.5 | 4 | 4.5 | 5 |

▼ Fixture Specifications

| Fixture | Kelvin Range | Dimming Range | Dimensions | Weight |
|-----------------|--------------|---------------|--|--------------------|
| FreeStyle 41 | 2500-9900 | 100%-1% | 52.5 x 9 x 4" w/ 6" barndoors (133.4 x 22.9 x 10.2cm w/ 15.3cm barndoors) | 16 lb (7.3kg) |
| FreeStyle/GT 41 | 2500-9900 | 100%-1% | 50 x 8 x 2.5" (127 x 20.3 x 6.4cm) | 12.5 lb (5.7kg) |
| Panel 41 Only | 2500-9900 | 100%-1% | 49.5 x 7.5 x 2.5" (125.7 x 19.1 x 6.4cm) | 9.6 lb (4.4kg) |

▼ LED Controller Specifications

| Controller | Input Voltage VAC | Amps VAC | Input Voltage VDC | Amps 24VDC | Kelvin Range | Dimming Range | Dimensions | Weight |
|------------|---------------------------|----------------|-------------------|------------|--------------|---------------|------------------------------------|-----------------|
| LED-151X | 100-240VAC, 50/60Hz, 150W | 1.25A 0.65A | 18-36VDC, 150W | 6.25A | 2500-9900 | 100%-1% | 15 x 4.5 x 3" (38 x 11.5 x 8cm) | 4.5 lb (2kg) |

▼ Details



▼ FreeStyle 41 LED DMX Systems




SYS-F41U

FreeStyle 41 LED DMX System, Univ

Contents

- 1 FreeStyle 41 LED Fixture
- 1 FreeStyle 151 LED DMX Controller
- 1 MTP-BG41 Mount w/ Baby Receiver (16mm)
- 1 Extension, 25ft

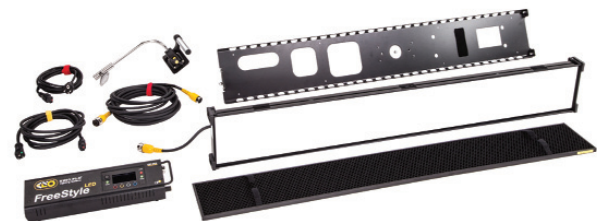

SYS-F41TU

FreeStyle/GT 41 LED DMX System, Univ

Contents

- 1 FreeStyle/GT 41 LED Fixture
- 1 FreeStyle 151 LED DMX Controller
- 1 MTP-BG41 Mount w/ Baby Receiver (16mm)
- 1 Extension, 25ft

▼ FreeStyle 41 LED DMX Accessories/ Cases



SYS-BK12
Block/KF21 Single Battery
System, 140Whr, 28.8V
(2 x Battery)




DFS-FS41-S
FreeStyle 41 SnapBag
w/ 2x Diffusion



MTP-KG41
KinoGrip 41K Mount w/
3/8" Pin (10mm)



MTP-BAL1
Kino Bal/Led
Controller Mount (16mm)



FIX-F41
FreeStyle 41 Fixture Shell



LVR-FS440-S
FreeStyle 41 SnapGrid, 40°




MTP-L
Kino 41 Lollipop
w/ 3/8" Pin (10mm)



STD-M36
Medium Duty, 36"
STD-M30
Medium Duty, 30"



FIX-F41T
FreeStyle/GT 41 Gaffer Tray



LVR-SL490-P
FreeStyle 41 Louver/HP, 90°
LVR-SL460-P
FreeStyle 41 Louver/HP, 60°



MTP-LBC
Kino 41 Lollipop
w/ Baby Receiver Curve
(16mm)



KAS-FS41-C
FreeStyle 41 Travel Case



PAN-F41
FreeStyle 41 LED Panel



MTP-BG41S
KinoGrip 41K Mount w/
Baby Receiver Short (16mm)



MTP-B41F
Kino Offset w/
Baby Receiver (16mm)



KAS-FS43
FreeStyle 41 Fixture (3)
Ship Case

FreeStyle 41 LED DMX Kits

▼ FreeStyle 41 LED DMX Kits



KIT-F41U

FreeStyle 41 LED DMX Kit, Univ w/ Travel Case

Contents

- 1 FreeStyle 41 LED Fixture
- 1 FreeStyle 151 LED DMX Controller
- 1 MTP-BG41 Mount w/
Baby Receiver (16mm)
- 1 Extension, 25ft
- 1 Travel Case

Dimensions

54.5 x 21 x 9"
(138.5 x 53.5 x 23cm)

Weight

49 lb
(22.2kg)



KIT-F41TU

FreeStyle/GT 41 LED DMX Kit, Univ w/ Travel Case

Contents

- 1 FreeStyle/GT 41 LED Fixture
- 1 FreeStyle 151 LED DMX Controller
- 1 MTP-BG41 Mount w/
Baby Receiver (16mm)
- 1 Extension, 25ft
- 1 Travel Case

Dimensions

54.5 x 21 x 9"
(138.5 x 53.5 x 23cm)

Weight

46 lb
(20.9kg)



Kino Flo Lighting Systems
2840 North Hollywood Way
Burbank, CA 91505

+1 818 767 6528 voice +1 818 767 7517 fax

www.kinoflo.com

© Kino Flo FreeStyle 41
No. 3110115 Rev A