




KINO FLO
Lighting Systems

celeb[®] 850

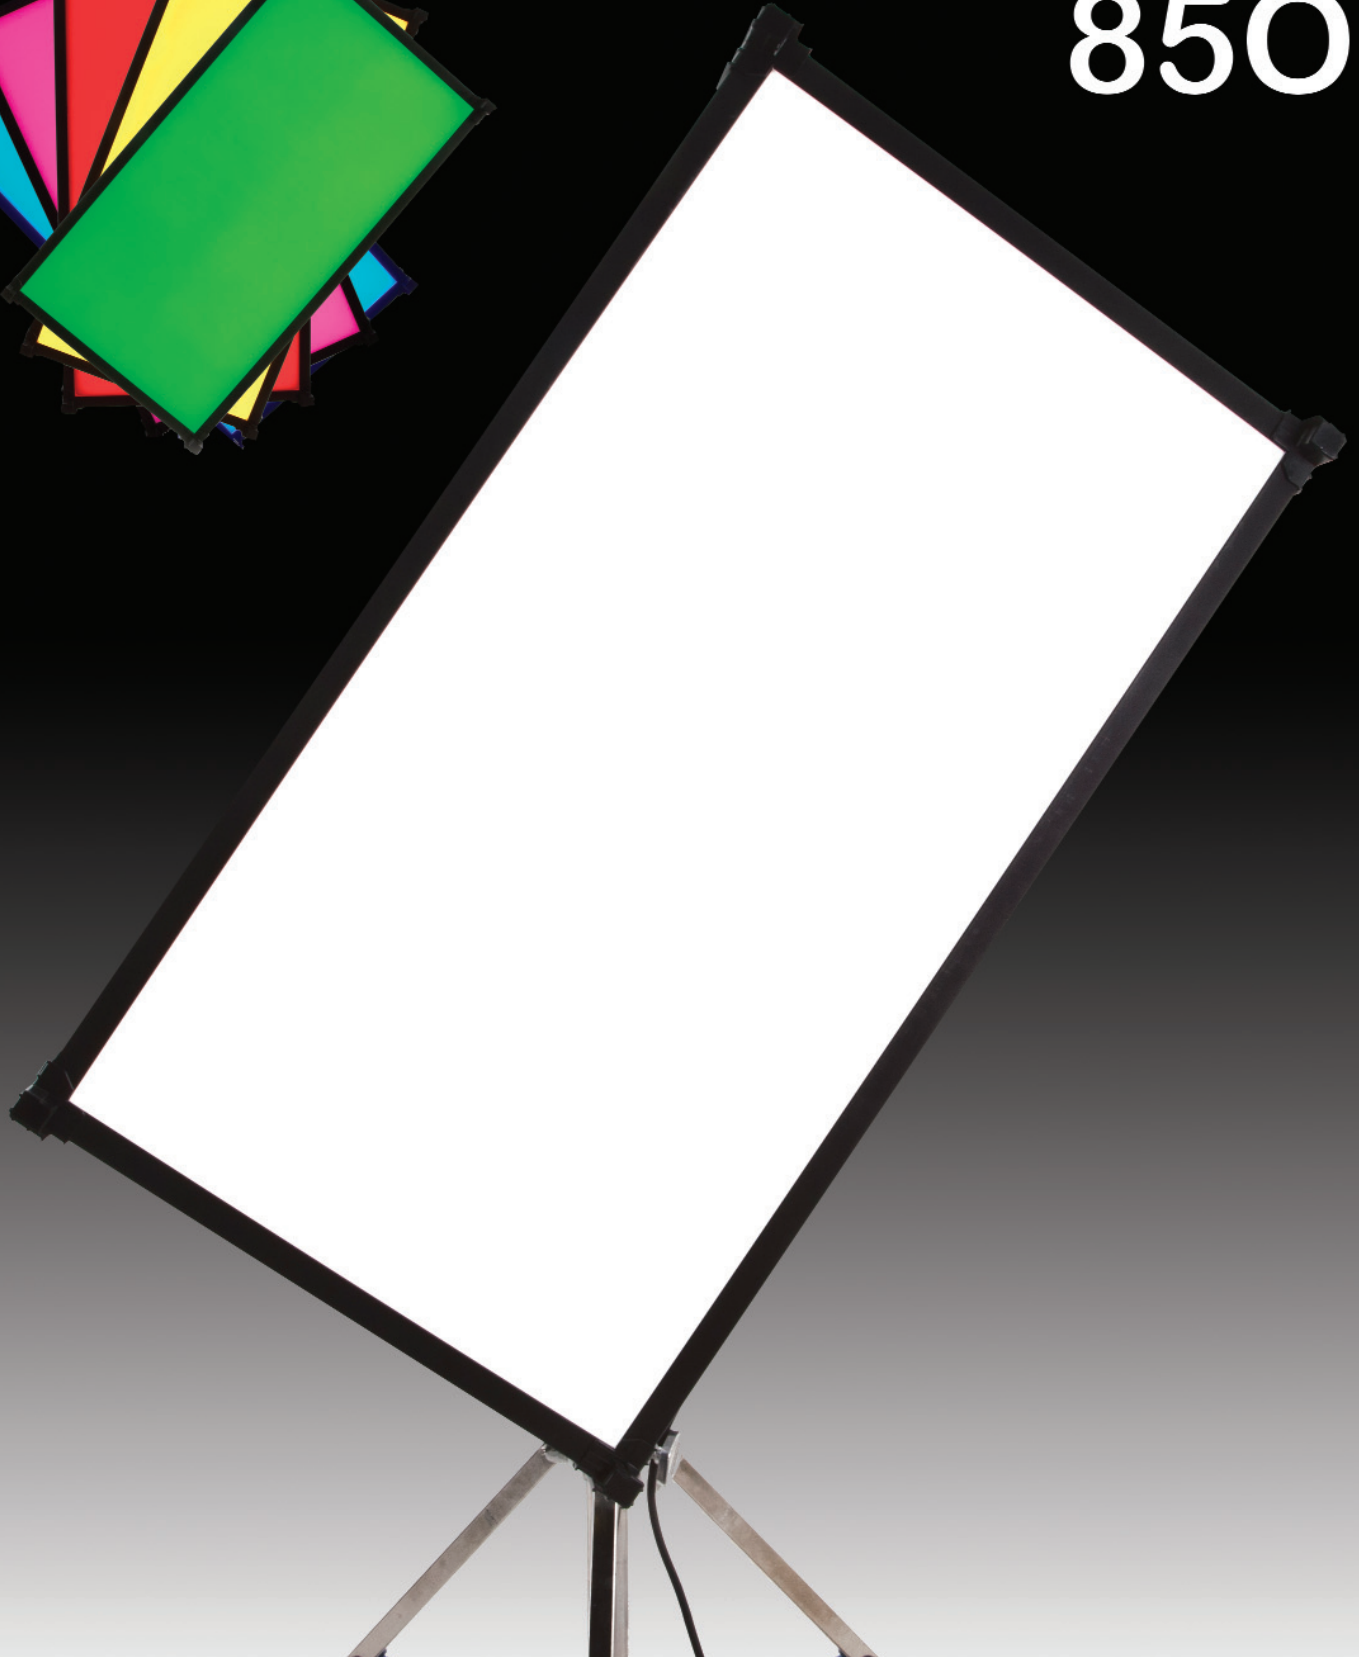

Celeb® 850 LED DMX



Center Mount Back



Yoke Back



Yoke Front

The Celeb® 850 joins Kino Flo's family line of LED soft lights. With new technical innovations the Celeb 850 features four menu options, one white, two color and **FX**. The white menu, Kelvin range is from 2700K to 6500K with **Dimming, Kelvin** and **Green/Magenta** control channels. In the first color menu, Kelvin is from 2500K to 9900K with three additional channels, **Gel, Hue Angle** and **Saturation**. The Gel channel includes Kino Flo presets and over 100 well known lighting gels. The second color menu provides individual **RGB** (red, green, blue) control. The **FX** (Effects) Mode has custom presets like Candle, Fire, TV, Police, Lightning, Paparazzi, Pulse and Scroll. The Celeb 850 also comes with standard DMX and wireless DMX (Lumen Radio®), and universal input 100-240VAC. SnapBag and SnapGrid accessories are also available.

Features include:

- Kelvin presets & custom settings, 2500K-9900K
- Manual & DMX Dimming, DMX wireless (Lumen Radio)
- Green/Magenta control
- Dial in any color through Hue Angle and Saturation control
- Kino Flo presets and Gels
- RGB control
- FX (Effects) control
- Center Mount, Yoke Mount & Pole-Op

▼ Celeb 850 LED DMX Center



CEL-850CU
Celeb 850 DMX
Center Mount, Univ



LVR-CE890
Celeb 850 Louver, 90°
(Included)



MTP-V63C
Celeb 850 Center
Mount Assembly
(Included)



MTP-V63JR
Celeb 850 Center
Junior Adapter (28mm)
(Included)

▼ Celeb 850 LED DMX Yoke



CEL-850YU
Celeb 850 DMX
Yoke, Univ



CEL-850PU
Celeb 850 DMX Pole-Op,
Univ



LVR-CE890
Celeb 850 Louver, 90°
(Included)

▼ Photometrics

Celeb 850

FC	1728	604	297	171	111	78	59	47	37	31
Feet	2	4	6	8	10	12	14	16	18	20
LUX	23040	9270	4527	2664	1755	1251	927	728	590	484
Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5

▼ Fixture Specifications

Fixture	Input Voltage VAC	Amps VAC	Kelvin Range	Dimming Range	Dimensions	Weight
Celeb 850 DMX Center	100~240VAC, 50/60Hz, 575W	5.0A 2.5A	2700~6500 2500~9900	100%~1%	45 x 6 x 25.5" (114 x 15 x 65cm)	40 lb (18kg)
Celeb 850 DMX Yoke	100~240VAC, 50/60Hz, 575W	5.0A 2.5A	2700~6500 2500~9900	100%~1%	50 x 5 x 28" (127 x 13 x 71cm)	38 lb (17kg)

▼ Details



▼ Celeb 850 LED DMX Kits



KIT-C850U
Celeb 850 DMX Center Mount Kit, Univ

Contents	Dimensions	Weight
1 Celeb 850 DMX Center	52 x 10 x 30.5"	74 lb
1 Ship Case	(132 x 25 x 77cm)	(34kg)



KIT-C850YU
Celeb 850 DMX Yoke Mount Kit, Univ

Contents	Dimensions	Weight
1 Celeb 850 DMX Yoke	53.5 x 10 x 36"	78 lb
1 Jr. Pin	(136 x 25 x 91cm)	(35kg)
1 Ship Case		

▼ Celeb 850 LED DMX Accessories/ Cases



BRD-CE8
Celeb 850 Barndoors
(Set of 4)



LVR-CE860
Celeb 850 Louver, 60°



7010050
Celeb 850 Yoke Assembly



DFS-CE800-S
Celeb 850 SnapBag
w/ 2 x Diffusion



MTP-180
Junior Pin Assembly
for Yoke (28mm)



7010051
Celeb 850
Pole-Up Assembly



LVR-CE840-S
Celeb 850 SnapGrid 40°



MTP-V63H1
Celeb 850 Center
Hanging Adapter (28mm)



KAS-CE850
Celeb 850 Center Ship Case

KAS-CE850-Y
Celeb 850 Yoke Ship Case



Kino Flo Lighting Systems
2840 North Hollywood Way
Burbank, CA 91505

+1 818 767 6528 voice +1 818 767 7517 fax

www.kinoflo.com

**© Kino Flo Celeb 850 LED DMX
No. 3110100 Rev D**